
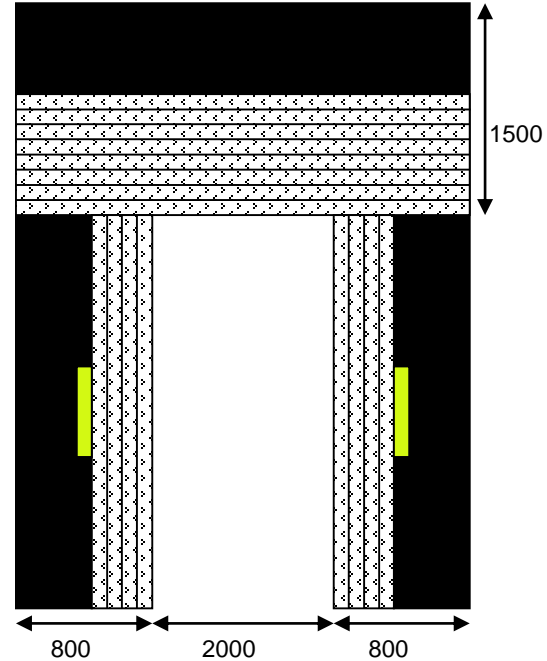


# Inflatable Dock Shelter Model DS4000

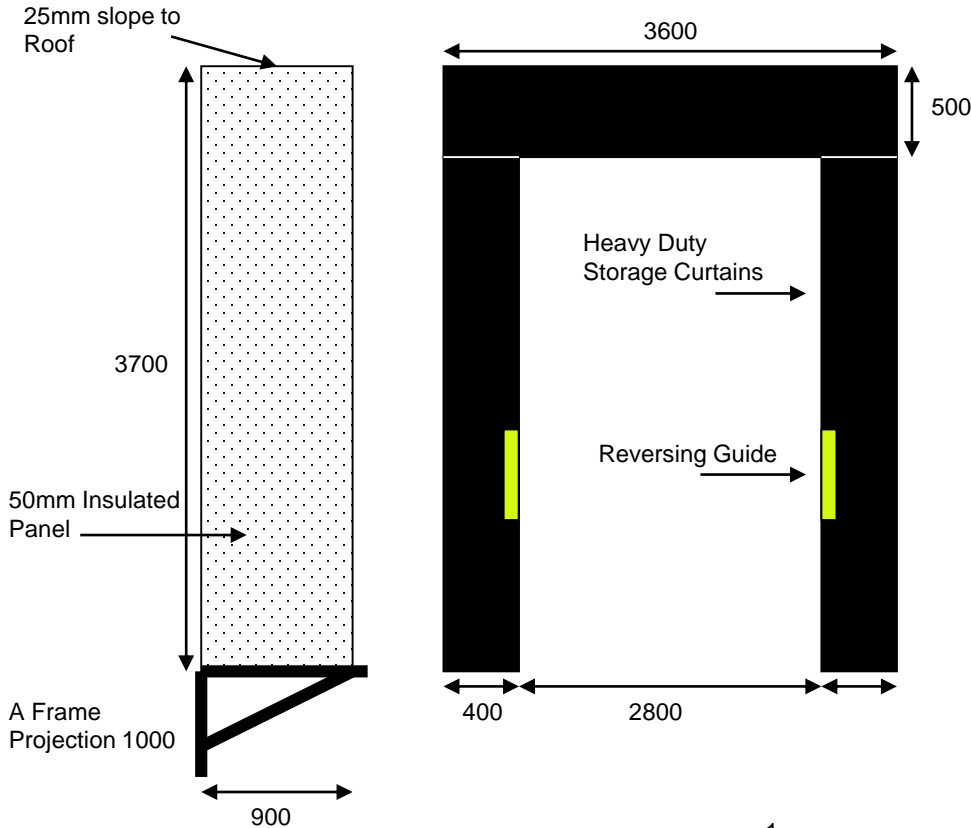

## Fixing Areas


- A minimum 50mm flat surface Area will be required per as follows
- 1 Full width of specified shelter
- 2 Full height of specified shelter
- 3 As 2 minus a minimum of 50mm
- 4 As 1 minus a minimum of 100mm

## Power Supply

Three phase & earth  
Rated at 6amps

## Power Consumption

0.75kw

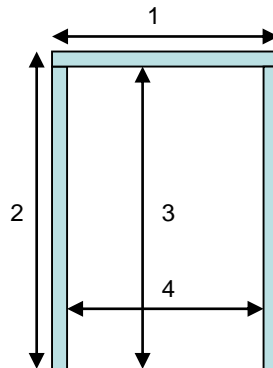

## Construction & Features

- Heavy duty 3.5mm storage curtains complete with reversing guide
- High tear resistant inflatable air bags keep maintenance to a minimum
- Flame retardant insulated panel prevents condensation contributing to A safer loading bay environment
- Fast inflation and deflation ensures a speedy operation

## Recommended Options

- Integrated controls with door, dock leveller
- Traffic light safety system
- Wheel guides
- Loading light